

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 July 2003 (24.07.2003)


PCT

(10) International Publication Number  
**WO 03/059528 A1**

- (51) International Patent Classification<sup>7</sup>: **B05C 5/00** (74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2, FIN-00100 Helsinki (FI).
- (21) International Application Number: **PCT/FI03/00025**
- (22) International Filing Date: 15 January 2003 (15.01.2003)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:  
20020081 16 January 2002 (16.01.2002) FI
- (71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **RANTANEN, Rauno** [FI/FI]; Metsästäjäkatu 44, FIN-05830 Hyvinkää (FI).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR FEEDING A TREATING AGENT ONTO A MOVING SURFACE

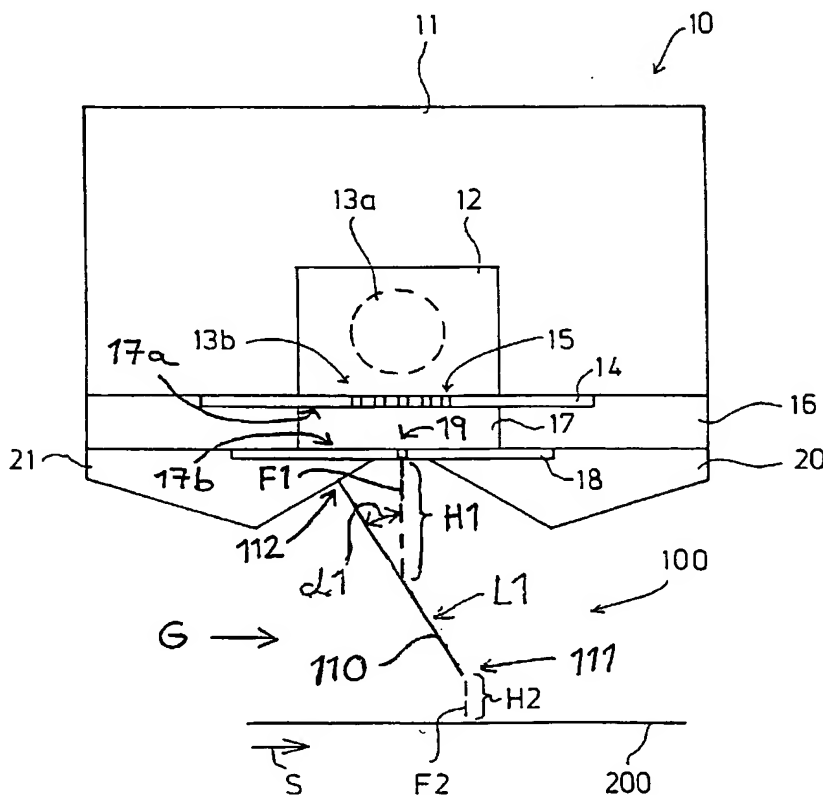

(57) Abstract: The apparatus comprises a feed apparatus (10) and an evening-out apparatus (100) placed underneath the feed apparatus. The feed apparatus (10) comprises a feed chamber (12) provided with an inlet opening (13a) and with an outlet opening (13b) and a nozzle plate (18) provided with holes (19) and communicating with the outlet opening (13b) of the feed chamber. The evening-out apparatus (100) comprises at least one inclined surface (110) which forms a downwards sloping flow path (L1) for the treating agent. The jets discharging from the outlet opening (13b) of the feed chamber (12) through the holes (19) of the nozzle plate (18) form a first treating agent flow (F1). One inclined surface (110) of the evening-out apparatus (100) receives the first treating agent flow (F1) and a second treating agent flow (F2) formed into an even laminar treating agent flow on the flow path (L1) of the evening-out apparatus (100) is passed onto a moving surface (200).